

FP-EFT 32M

3 Phase Coupling / Decoupling Network for EFT / Burst

■ **IEC / EN and ANSI** standards cover burst testing of single and three phase AC and DC power ports. They include recommendations for the test equipment, the test set-ups and the test procedures. The IEC 61000-4-4 Edition 2: 2004 now defines the impulse shape not only at the generator output but also at the CDN output.

This Edition 2 requires a pure common mode coupling only. This means that the burst signals are coupled simultaneously into all paths at the same time. Because of this no coupling path selection during testing is necessary. This speeds up the test time.

The FP-EFT 32M couples the burst into an EUT while preventing the impulses from polluting the three phase power supply.

The FP-EFT 32M has manual coupling path selection to verify the functionality of each path as recommended in the IEC 61000-4-4 Edition 2: 2004. This can also be used to select different coupling paths according to ANSI standards which requires a path by path burst test.

Used together with the PEFT 4010, PEFT Junior or PEFT.1 generators, the FP-EFT 32M can be used to inject EFT/burst impulses on the three phase supply.

With a 100 year history of innovation, service centers on three continents and a full staff development and support engineers, HAEFELY HIPOTRONICS is the clear choice for all your transient immunity test needs.



FEATURES

- 5/50ns** impulse shape
- 8kV** impulse voltage
- manual **coupling path selection**
- 690Vac** phase-phase
400Vac phase-neutral
- 32A** per phase EUT Current
- Phase angle** synchronization possible

BENEFITS

International Application – Specifically designed to meet and exceed the requirements of IEC, EN, and ANSI tests for power line applications.

Maximum Mains Voltage – FP-EFT 100M2 is designed to operate at the maximum power supply voltages available anywhere in the world.

Easy – The simple design allows operators to test safely and easily.

Mains Switch – This switch allows the disconnection of all phases and neutral so that no mains voltage is present at the CDN output.

Sturdy and Reliable – Careful component selection ensures that the FP-EFT 100M2 will continue to operate under the most strenuous testing regime.

Faster Completion of Testing Program - Since the IEC 61000-4-4 Edition 2: 2004 requires a pure common mode test only the test time is sped up.

APPLICATIONS

- Three phase power line systems
- IEC/ EN 61000-4-4 Edition 1 & 2 Power lines
- ANSI C62.41 & C.37.90.1 Power lines

TECHNICAL SPECIFICATIONS

Maximum Impulse Voltage	8kV Burst
Maximum AC Voltage	690V (phase - phase) 400V (phase - neutral)
Maximum DC Voltage	110V
Maximum AC Current	32A
Maximum DC Current	32A

Mains Connections	4mm safety banana sockets
EUT connections	4mm safety banana sockets
Phase Sync. source	fixed between L3 and PE
Coupling Paths	Manual Selection
Residual pulse voltage at line input	max. 10% of the applied impulse amplitude

Weight and Dimensions

10 kg	45 x 20 x 50 cm (w x h x d)
-------	-----------------------------


FP-EFT 32M Art. No. 2490170

- Qty. 1 FP-EFT 32M2 CDN
- Qty. 1 Coaxial HV cable 0.33m with SHV plugs
- Qty. 1 Cable set
- Qty. 1 Copper foil for ground connection
- Qty. 1 Users Manual

OPTIONS AND ACCESSORIES

- AXOS5** Burst generator up to 4.8kV with an integrated single phase CDN according to IEC 61000-4-4 Edition 1 and 2, ANSI C37.90& ANSIC62.41
Art. No. 2490400
- PEFT 8010** Burst generator up to 7.3kV with an integrated single phase CDN according to IEC 61000-4-4 Edition 1 and 2, ANSI C37.90* & ANSI C62.41
- FP-EFT 100M** Manual coupling decoupling network for three phase mains up to 100A per phase
Art. No. 2495860
- Adapter** Verification adapter to verify the impulse shape at the output of the FP-EFT 32M
Art. No. 2490040
- Verification Set** EFT verification set includes all attenuators and cables to perform an impulse verification either at the generator output or the CDN output
Art. No. 2499951
- IP4A** Capacitive coupling clamp for control and data lines according to IEC 61000-4-4 and ANSI C37.90.1
Art. No. 2491300
- WinFEAT&R** Control and reporting software. Runs under Windows 98, NT, ME, 2000, XP
Art. No. 2499701

WinFEAT&R Control Window

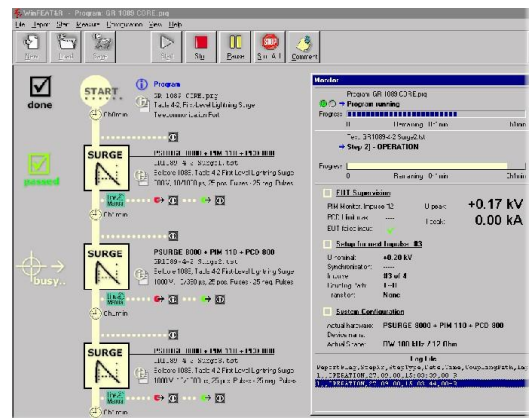

PRECISION TEST

HAEFELY
HIPOTRONICS

OFFICES:

Europe

Haefely Test AG
Birsstrasse 300
4052 Basel
Switzerland

☎ + 41 61 373 4111
☎ + 41 61 373 4912
✉ sales@haefely.com

China

Haefely Test AG Representative Beijing Office
8-1-602, Fortune Street
No. 67, Chaoyang Road, Chaoyang District
Beijing, China 100025

☎ + 86 10 8578 8099
☎ + 86 10 8578 9908
✉ sales@haefely.com.cn

North America

Hipotronics, Inc.
1650 Route 22 N
Brewster, NY 10509
United States

☎ + 1 845 279 3644
☎ + 1 845 279 2467
✉ sales@hipotronics.com

HAEFELY HIPOTRONICS has a policy of continuous product improvement. Therefore we reserve the right to change design and specification without notice.