


Bluetooth® X-Series Measurement App, Multi-Touch UI

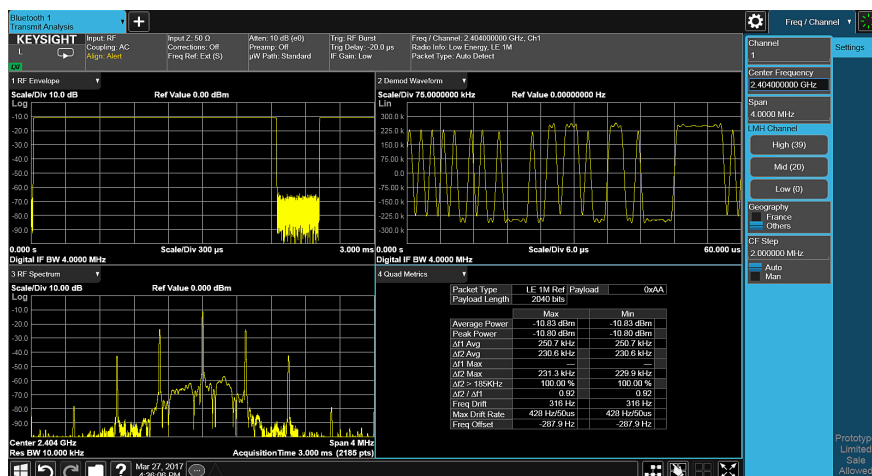

N9081EM0E

- Measure *Bluetooth* RF transmitter performance, compliant to Bluetooth RF test specifications 2.1+EDR/3.0/3.0+HS, Low Energy (RF-PHY.TS/4.0/4.2), *Bluetooth* 5 and 5.1
- Perform one-button tests with pass/fail limits per *Bluetooth* RF test specifications
- Multi-touch user interface or SCPI remote user interface
- Built-in context sensitive help
- Flexible licensing provides the option of using perpetual or time based licenses with one or multiple signal analyzers

Bluetooth Measurement Application

The *Bluetooth* measurement application transforms the X-Series signal analyzers into standard-based *Bluetooth* RF transmitter testers by adding fast, one-button RF conformance measurements to help you design, evaluate, and manufacture your *Bluetooth* devices. The measurement application is standard-compliant to the *Bluetooth* Core Specification to verify your *Bluetooth* design with confidence and support manufacturing with a single application covering basic rate, EDR, low energy technologies, *Bluetooth* 5 and 5.1 for production.

X-Series measurement applications

X-Series measurement applications increase the capability and functionality of Keysight Technologies, Inc. signal analyzers to speed time to insight. They provide essential measurements for specific tasks in general-purpose, cellular communications, wireless connectivity applications, covering established standards or modulation types. Applications are supported on both benchtop and modular, with the only difference being the level of performance achieved by the hardware you select.

X-Series measurement applications can help you:

- Gain more insight into device performance with intuitive display and graphs for your application. Select from our library of over 25 different measurement applications.
- Ensure that your design meets the latest standard. Updates are made to the X-Series measurement applications as standards evolve.
- Apply the same measurement science across multiple hardware platforms for consistent measurement results over your design cycle from R&D to production.
- Choose the license structure that meets your business needs. We provide a range of license types (node-locked, transportable, floating or USB portable) and license terms (perpetual or time-based).

Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.

- Electronic design automation (EDA) software
- Application software
- Programming environments
- Productivity software



Learn more at

www.keysight.com/find/software

Start with a 30-day free trial.

www.keysight.com/find/free_trials



RF Transmitter Tests

With the X-Series signal analyzers and the *Bluetooth* measurement application, you can perform the RF layer test procedure and specification (TSS/TP 4).

Standard-based RF transmitter tests

The *Bluetooth* specifications are developed and licensed by the *Bluetooth* Special Interest Group (SIG). The *Bluetooth* Test Specification document contains the Test Suite Structure (TSS) and Test Purpose (TP) to test the *Bluetooth* RF layer including Basic Rate, Enhanced Data Rate, Low Energy, *Bluetooth* 5 and 5.1. This specification is a basis for conformance tests of *Bluetooth* devices, giving a high probability of air interface inter-operability between different manufacturer's *Bluetooth* devices.

The Keysight X-Series *Bluetooth* measurement application refers to the following *Bluetooth* RF test specifications:

- *Bluetooth* Test Specification 1.2/2.0/2.0+EDR/2.1/2.1+EDR/3.0/3.0+HS
- *Bluetooth* Low Energy RF Test Specifications: RF-PHY.TS/4.0/4.2
- *Bluetooth* 5 (higher bandwidth or longer range) and 5.1 (AoA/AoD)

Table 1 provides a list of tests with their test purpose identifiers and corresponding measurement applications for transmitter tests only.

Table 1. *Bluetooth* RF transmitter measurements and the corresponding measurements in N9081EM0E.

Bluetooth transmitter tests	Identifier²	N9081EM0E X-Series measurement application
Basic rate		
Output power	TRM/CA/01/C	Transmit analysis
Tx output spectrum –20 dB bandwidth	TRM/CA/05/C	Output spectrum bandwidth
Tx output spectrum – adjacent channel power	TRM/CA/06/C	Adjacent channel power
Modulation characteristics	TRM/CA/07/C	Transmit analysis
Initial carrier frequency tolerance	TRM/CA/08/C	Transmit analysis
Carrier frequency drift	TRM/CA/09/C	Transmit analysis
Enhanced data rate (EDR)		
EDR relative transmit power	TRM/CA/10/C	Transmit analysis
EDR carrier frequency stability and modulation accuracy	TRM/CA/11/C	Transmit analysis
EDR differential phase encoding	TRM/CA/12/C	Transmit analysis
EDR in-band spurious emissions	TRM/CA/13/C	EDR in-band spurious emissions
Low Energy (LE) or Ultra Low Power (ULP)		
Output power at NOC	TRM-LE/CA/01/C	Transmit analysis
Output power at EOC	TRM-LE/CA/02/C	Transmit analysis
In-band emission at NOC	TRM-LE/CA/03/C	LE in-band emission
In-band emission at EOC	TRM-LE/CA/04/C	LE in-band emission
Modulation characteristics	TRM-LE/CA/05/C	Transmit analysis
Carrier frequency offset and drift at NOC	TRM-LE/CA/06/C	Transmit analysis
Carrier frequency offset and drift at EOC	TRM-LE/CA/07/C	Transmit analysis

1. Radio frequency Test Suite Structure (TSS) and Test Purposes (TP) system specifications
2. Identifier format is: (Test)/CA/NN/C, in which
 - TRM = Transmitter test
 - CA = Capability test (defines the type of testing)
 - NN = Test purpose number
 - C = Conformance test performed on dedicated *Bluetooth* test system

Measurement details

All of the *Bluetooth* RF transmitter measurements as defined for basic, EDR and low energy in the test specifications, as well as a wide range of additional measurements and analysis tools, are available with a press of a button (Table 2). These measurements are fully remote controllable via the IEC/IEEE bus or LAN, using SCPI commands.

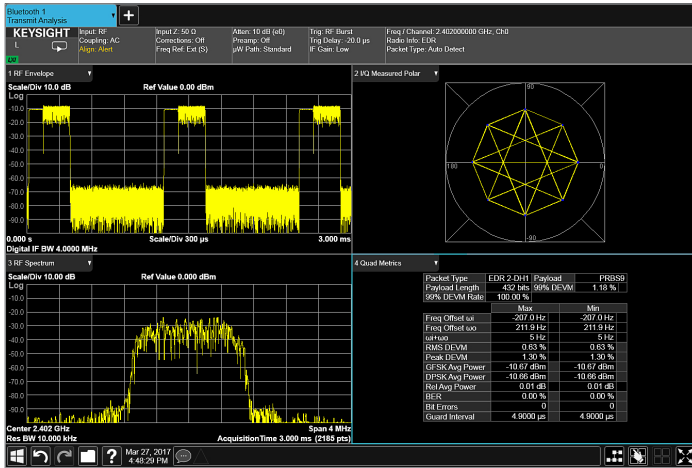


Figure 1. Transmit analysis for EDR signal

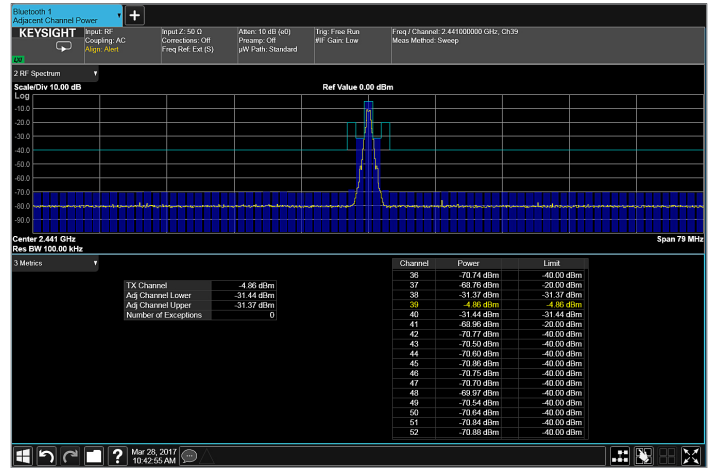


Figure 2. Adjacent channel power for basic rate Bluetooth signal

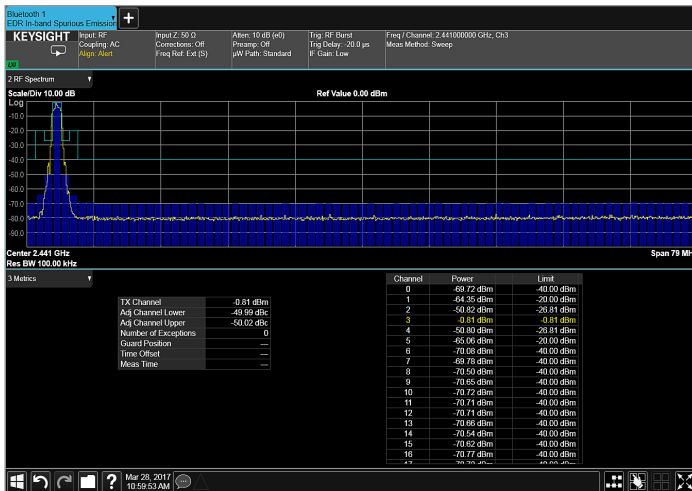


Figure 3. EDR in-band emission



Figure 4. Transmit analysis for low energy (LE) signal

Measurement details (Continued)

Table 2. One-button measurements provided by the N9081EM0E measurement application.

Bluetooth Technology	Basic data rate	Enhanced data rate	Low energy <i>(Bluetooth 4.0/4.2/5/5.1)</i>
Transmit analysis			
Output power (in time domain)			
– Peak power	•		•
– Average power	•		•
Modulation characteristics			
– $\Delta F1$ avg (11110000)	•		•
– $\Delta F2$ avg (10101010)	•		•
– Min $\Delta f1/ \Delta f2$ max	•		•
– Max $\Delta F1/ \Delta F2$ max	•		•
– $\Delta F2 > 115$ kHz	•		•
– $\Delta F2/\Delta F1$ ratio			
Initial carrier frequency tolerance (ICFT)	•		
Frequency offset			•
Carrier frequency drift			
– Frequency drift	•		•
– Max drift rate	•		•
Adjacent channel power	• ²		
Output power – 20 dB bandwidth	•		
EDR transmit analysis			
Relative transmit power			
– GFSK average power		•	
– DPSK average power		•	
– Relative power		•	
Frequency stability and modulation accuracy			
– Freq offset $\omega_i/\omega_0, \omega_i+\omega_0$		•	
– RMS DEVM (differential DVM)		•	
– Peak DEVM		•	
Differential phase decoding			
– BER		•	
– Bit error		•	
– 99% DEVM		•	
EDR in-band spurious emissions		• ²	
LE in-band emissions			• ²
CTE Time			• ¹
RFU			• ¹
CTE Type			• ¹

1. This feature requires the firmware above A.26.0x and your N9081EM0E license version date must be above 2020.0220.

2. This measurement can support the NFE (Noise Floor Extension) function but requires the firmware above A.27.0x and N9081EM0E license version date must be above 2020.0701.

Key Specifications

Definitions

- Specifications describe the performance of parameters covered by the product warranty.
- 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95% of cases with a 95% confidence. These values are not covered by the product warranty.
- Typical values are designated with the abbreviation “typ.” These are performance beyond specification that 80% of the units exhibit with a 95% confidence. These values are not covered by the product warranty.
- Nominal values are designated with the abbreviation “nom.” These values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Note: Data subject to change

Supported devices and standard version

Device type	Bluetooth devices
Standard version	Bluetooth radio frequency system specification 1.2/2.0/2.0+EDR/2.1/2.1+EDR revision 2.1.E.0 <ul style="list-style-type: none">- basic rate- enhanced data rate Bluetooth Low Energy RF PHY test specification (LE RF-PHY.TS/4.0/4.2) Bluetooth RF PHY test specification (Bluetooth 5 and 5.1)
Power classes	Class 1, class 2 and class 3
Radio band	Bluetooth basic rate and EDR system: 2.400 to 2.4835 GHz ($f = 2402 + k$ MHz, $k = 0, \dots, 78$) Bluetooth low energy system: 2.400 to 2.4835 GHz ($f = 2402 + k \times 2$ MHz, $k = 0, \dots, 39$)

For a complete list of specifications refer to the appropriate specifications guide.

- UXA: www.keysight.com/find/uxa_specifications
PXA: www.keysight.com/find/pxa_specifications
MXA: www.keysight.com/find/mxa_specifications
EXA: www.keysight.com/find/exa_specifications
CXA: www.keysight.com/find/cxa_specifications

Key Specifications

Supported standards				
Bluetooth basic rate	Revision 2.1.E.0			
Bluetooth Enhanced Data Rate	Revision 2.1.E.0/3.0/3.0+HS			
Bluetooth Low Energy	LE. RF-PHY.TS/4.0/4.2/5/5.1			
Description	PXA	MXA	EXA	CXA
Basic rate or Low energy measurements				
Output power				
Packet type	DH1, DH3, DH5, HV3			
Payload	PRBS9, BS00, BSFF, BSOF, BS55			
Synchronization	RF Burst or Preamble			
Trigger	External, RF Burst, Periodic Timer, Free Run, Video			
Supported measurements	Average power, peak power			
Range	+30 dBm to -70 dBm			
Absolute power accuracy	± 0.20 dB (95%)	± 0.25 dB (95%)	± 0.29 dB (95%)	± 0.61 dB (95%)
Measurement floor	-70 dBm (nom)			
Modulation characteristics				
Packet type	DH1, DH3, DH5, HV3 (for Basic), Reference packet (for LE)			
Payload	BSOF, BS55			
Synchronization	Preamble			
Trigger	External, RF Burst, Periodic Timer, Free Run, Video			
Supported measurements	Min/max Δf_{1avg} , min Δf_{2max} (kHz), total $\Delta f_{2max} > \Delta f_{2max}$ lower limit (%), min of min $\Delta f_{2avg}/\max \Delta f_{1avg}$, pseudo frequency deviation (Δf_1 and Δf_2)			
RF input level range	+30 dBm to -70 dBm			
Deviation range	± 250 kHz (nom)			
Deviation resolution	100 Hz (nom)			
Measurement accuracy	± 100 Hz + tfa^1 (nom)			
Initial carrier frequency tolerance				
Packet type	DH1, DH3, DH5, HV3 (for Basic), Reference packet (for LE)			
Payload	PRBS9, BS00, BSFF, BSOF, BS55			
Synchronization	Preamble			
Trigger	External, RF Burst, Periodic Timer, Free Run, Video			
RF input level range	+30 dBm to -70 dBm			
Measurement range	Nominal channel freq ± 100 kHz (nom)			
Measurement accuracy	± 100 Hz + tfa^1 (nom)			
Carrier frequency drift				
Packet type	DH1, DH3, DH5, HV3 (for Basic), Reference packet (for LE)			
Payload	PRBS9, BS00, BSFF, BSOF, BS55			
Synchronization	Preamble			
Trigger	External, RF Burst, Periodic Timer, Free Run, Video			
RF input level range	+30 dBm to -70 dBm			
Measurement range	± 100 kHz (nom)			
Measurement accuracy	± 100 Hz + tfa^1 (nom)			
Adjacent channel power² (Basic Rate)				
Packet type	DH1, DH3, DH5, HV3			
Payload	PRBS9, BS00, BSFF, BSOF, BS55			
Synchronization	None			
Trigger	External, RF Burst, Periodic Timer, Free Run, Video			
Absolute power accuracy	Dominated by the variance of measurements ⁴			
Adjacent channel power (Low Power)				
Packet type	Reference packet			
Payload	PRBS9, BS00, BSFF, BSOF, BS55			
Packet length	Up to 255 octets (Bluetooth 4.2)			
Trigger	External, RF Burst, Periodic Timer, Free Run, Video			
Absolute power accuracy	Dominated by the variance of measurements ⁴			

Key Specifications (Continued)

Description	PXA	MXA	EXA	CXA
Enhanced data rate (EDR) measurements				
EDR relative transmit power				
Packet type		2-DH1, 2-DH3, 2-DH5, 3-DH1, 3-DH3, 3-DH5		
Payload		PRBS9, BS00, BSFF, BS0F, BS55		
Synchronization		DPSK synchronization sequence		
Trigger		External, RF Burst, Periodic Timer, Free Run, Video		
Supported measurements	Power in GFSK header, power in PSK payload, relative power between GFSK header and PSK payload			
RF input level range	+30 dBm to -70 dBm			
Absolute power accuracy	± 0.20 dB (95%)	± 0.25 dB (95%)	± 0.29 dB (95%)	± 0.61 dB (95%)
Measurement floor	-70 dBm (nom)			
EDR modulation accuracy				
Packet type		2-DH1, 2-DH3, 2-DH5, 3-DH1, 3-DH3, 3-DH5		
Payload		PRBS9, BS00, BSFF, BS55		
Synchronization		DPSK synchronization sequence		
Trigger		External, RF Burst, Periodic Timer, Free Run, Video		
Supported measurements	rms DEVM, peak DEVM, 99% DEVM			
RF input level range	+30 dBm to -70 dBm			
Range (rms DEVM)		0 to 12%		0 to 12% (nom)
Floor		1.5%		1.6% (nom)
Accuracy	± 1.2% ⁵			
EDR carrier frequency stability				
Packet type		2-DH1, 2-DH3, 2-DH5, 3-DH1, 3-DH3, 3-DH5		
Payload		PRBS9, BS00, BSFF, BS55		
Synchronization		DPSK synchronization sequence		
Trigger		External, RF Burst, Periodic Timer, Free Run, Video		
Supported measurements	Worst case initial frequency error(ω_i) for all packets (carrier frequency stability), worst case frequency error for all blocks (ω_o), ($\omega_o + \omega_i$) for all blocks			
RF input level range	+30 dBm to -70 dBm			
Carrier frequency stability and frequency error	± 100 Hz + tfa^1 (nom)			
EDR in-band spurious emissions				
Packet type		2-DH1, 2-DH3, 2-DH5, 3-DH1, 3-DH3, 3-DH5		
Payload		PRBS9, BS00, BSFF, BS55		
Synchronization		DPSK synchronization sequence		
Trigger		External, RF Burst, Periodic Timer, Free Run, Video		
Measurement accuracy				
Offset freq = 1 MHz to 1.5 MHz	Dominated by the ambiguity of the measurement standards ⁶			
Offset freq = other offset (2 MHz to 78 MHz)	Dominated by the variance of measurements ⁴			

1. tfa = transmitter frequency × frequency reference accuracy.
2. The accuracy is for absolute power measured at 2.0 MHz offset and other offsets (offset = K MHz, K = 3, ..., 78).
3. The accuracy is for absolute power measured at 2.0 MHz offset and other offsets (offset = 2 MHz * K, K = 2, ..., 39).
4. The measurement at these offsets is usually the measurement of noise-like signals and therefore has considerable variance. For example, with 100 ms sweeping time, the standard deviation of the measurement is about 0.5 dB. In comparison, the computed uncertainties of the measurement for the case with CW interference is only ± 0.20 dB (PXA), ± 0.25 dB (MXA), ± 0.29 dB (EXA), ± 0.61 dB (CXA) (95th percentile).
5. The accuracy specification applies when the EVM to be measured is well above the measurement floor. Please refer to *Bluetooth* specification guide for N9081EM0E for more detail explanation.
6. The measurement standards call for averaging the signal across 3.5 μ s apertures and reporting the highest result. For common impulsive power at these offsets, this gives a variation of result with the time location of that interference that is 0.8 dB peak-to-peak and changes with a scallop shape with a 3.5 μ s period. Uncertainties in the accuracy of measuring CW-like relative power at these offsets are nominally only ± 0.03 dB (PXA), ± 0.07 dB (MXA), ± 0.09 dB (EXA), ± 0.11 dB (CXA), but observed variations of the measurement algorithm used with impulsive interference are similar to the scalloping error.

Ordering Information

Flexible licensing and configuration

- **Perpetual:** License can be used in perpetuity.
- **Time-based:** License is time limited to a defined period, such as 12-months.
- **Node-locked:** Allows you to use the license on one specified instrument/computer.
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool.
- **Floating:** Allows you to access the license on networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased.
- **USB portable:** Allows you to move the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately.
- **Software support subscription:** Allows the license holder access to Keysight technical support and all software upgrades.

You Can Upgrade!

All of our X-Series application options are license-key upgradeable.



Bluetooth® measurement application (N9081EMOE)

Model	Software license type	Support contract	Support subscription (12-month) ²
N9081EMOE-1FP	Node-locked perpetual	R-Y5C-001-A ²	R-Y6C-001-L ²
N9081EMOE-1FL	Node-locked 12-month	R-Y4C-001-L ¹	Included
N9081EMOE-1TP	Transportable perpetual	R-Y5C-004-D ²	R-Y6C-004-L ²
N9081EMOE-1TL	Transportable 12-month	R-Y4C-004-L ¹	Included
N9081EMOE-1NP	Floating perpetual (single site)	R-Y5C-002-B ²	R-Y6C-002-L ²
N9081EMOE-1NL	Floating 12-month (single site)	R-Y4C-002-L ¹	Included
N9081EMOE-1UP	USB portable perpetual	R-Y5C-005-E ²	R-Y6C-005-L ²
N9081EMOE-1UL	USB portable 12-month	R-Y4C-005-L ¹	Included

Try Before You Buy!

Evaluate a full-featured version of our X-Series measurement application with our **FREE** trial. Redeem one 30-day trial license of each measurement application online at: www.keysight.com/find/X-Series_apps_trial

Hardware Configurations

To learn more about compatible platforms and required configurations, please visit: www.keysight.com/find/X-Series_apps_platform

Software Models and Options

To learn more about X-Series measurement application licensing, model numbers and options, please visit:

www.keysight.com/find/X-Series_apps_model

One month software support subscription extensions³

Model	Description
R-Y6C-501 ³	1-month of software support subscription for node-locked license
R-Y6C-502 ³	1-month of software support subscription for floating license (single site)
R-Y6C-504 ³	1-month of software support subscription for transportable license
R-Y6C-505 ³	1-month of software support subscription for USB portable license

1. All time-based X-Series measurement application licenses includes a 12-month support contract which also includes the 12-month software support subscription as same duration.
2. Support contract must bundle software support subscription for all perpetual licenses in the first year. All software upgrades and Keysight support are provided for software licenses with valid support subscription.
3. After the first year, software support subscription may be extended with annual or monthly software support subscription extension.

Hardware configuration

For optimizing measurements on *Bluetooth* signals with the *Bluetooth* measurement application, Keysight recommends a minimum level of X-Series multi-touch instrument hardware functionality at each instrument performance point. Supported instruments include:

Benchtop:	PXIe:
- UXA N9041B ¹	- VSA up to 6 GHz M9391A
- UXA N9040B	- VSA up to 50 GHz M9393A
- PXA N9030B	- VXT M9410A or M9411A
- MXA N9020B	
- EXA N9010B	
- CXA N9000B	

Capability	Instrument Option	Benefit
Analysis bandwidth	25 MHz minimum (-B25) or wider	Required: Up to full aggregated bandwidth for multiple carrier capture for LTE-Advanced TDD transmit on/off power measurement
Precision Frequency Reference	-PFR	Recommended: For enhanced frequency accuracy and repeatability for lower measurement uncertainty
Electronic Attenuator	-EA3	Recommended: Fast and reliable attenuation changes ideal for manufacturing without the wear associated with mechanical attenuators up to 3.6 GHz in 1 dB steps
Pre-amplifier	3.6 GHz (-P03) or higher	Recommended: For maximizing the measurement sensitivity
Fine Resolution Step attenuator	-FSA	Recommended: Useful for maximizing useable dynamic range to see signals
Analog baseband I/Q inputs	-BBA on PXA and MXA only	Optional: To extend measurements at baseband if required by device under test

1. Currently pulse analysis measurement application has only been qualified for UXA N9041B Input 1 Port.

Related Literature

N9081A & W9081A Bluetooth, Self-Guide Demonstration,
Literature Number 5990-6161EN

Bluetooth Measurement Fundamentals, Application Note,
Literature Number 5988-3760EN

Verifying Bluetooth Baseband Signals using Mixed Signal Oscilloscopes, Application Note AN 1333-3, Literature Number 5988-2181EN

Keysight E4438C Signal Studio for Bluetooth, Application Note 1421,
Literature Number 5988-5417EN

Keysight Innovative Solution for Testing Bluetooth Enhanced Data Rate Products, Product Overview, Literature Number 5989-3055EN

User's and Programmer's Reference Guide is available in the library section of the N9081EM0E product pages.

Web

Bluetooth X-Series measurement app, multi-touch UI product webpage:
www.keysight.com/find/N9081E

X-Series measurement applications:
www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:
www.keysight.com/find/X-Series

Application pages:
www.keysight.com/find/N9081EM0E

Industry pages:
www.keysight.com/find/IoT

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:
www.keysight.com/find/contactus

